

Merrychef Rapid High Speed Cook Oven

eikon® e2s HP



Standard Features


- Compact 365mm wide footprint – fits on a 600mm bench depth
- Oven cavity to suit up to 306mm x 308mm / 12" plate size
- Best in class energy efficiency – 0.7kWh in standby mode
- Rapid cooking up to 20 times faster than a convection oven
- Accelerated Cooking Technology® combines three heat technologies: impingement, microwave and convection heat
- Ventless cooking capabilities through built in catalytic converter
- Colour easyTouch® icon driven touch screen control panel with the capability of storing up to 1,024 multi-stage recipe programs
- Each program offers up to six (6) stages with programmable cooking times, microwave power setting and user instructions for each stage
- Easy menu updates or data transfer via USB
- Precise temperature setting range from 100°C - 275°C
- Quiet operation – 45.3dbA in standby mode
- Self-diagnostics capability to monitor components
- Soft edge design with cool to touch door exterior
- Stainless steel construction
- Easy to clean seam welded cavity with large rounded edges
- Easy access to front facing air filter
- Rail surrounding accessory storage on top of oven (e2s B & e2s R models only)

Includes

- Solid cook plate
- Guarded paddle with sides
- Solid base basket - full size
- Cool down pan
- Cook plate liners (2)
- Cleaning care package, consisting of:
 - 1x oven cleaner (bottle)
 - 1x oven protector (bottle)

Accessories

- Baskets
- Cook plates
- Cook plate liners
- Paddles
- Handles

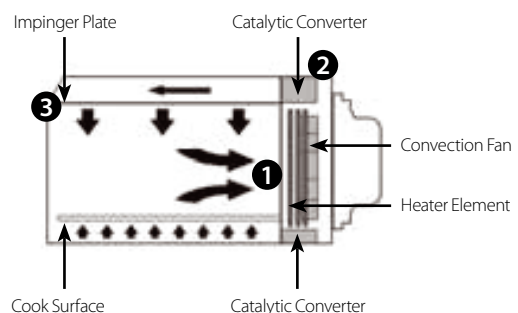


How it works


The convection fan pulls air in through the back of the cavity (1). This is then heated and returned to the cavity through the catalytic converters (2) and impinger plate (3) to produce an even heat pattern in the oven. This heat pattern allows food to cook evenly and produces a crisp golden finish every time.

Merrychef Rapid High Speed Cook Oven

eikon® e2s HP

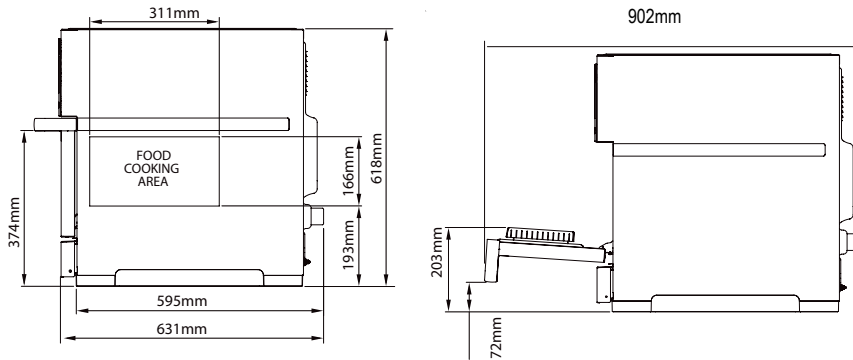

Internal cavity width 311mm

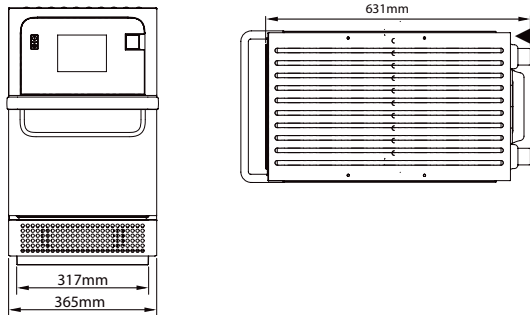

MICROWAVE POWER

Microwave settings, off or 5-100% in 1% increments
Distribution system, rotating active antennae

CONVECTED HEAT

Temperature settings OFF and from 100° to 275°C
in 1°C steps
Distribution system, Tuned Impingement

DIMENSIONS

(e2s)

Width	365 mm
Depth	595 mm
Height	620 mm
Weight	60.7 kg

(e2s B, e2s R)

Width	365 mm
Depth	595 mm
Height	644 mm
Weight	61.1 kg

PACKED DIMENSIONS

Width	540 mm
Depth	895 mm
Height	860 mm
Weight (including cleaning system)	74 kg

INSTALLATION REQUIREMENTS

Rear	50 mm
Right	50 mm
Left	50 mm
Top	50 mm

INSTALLATION REQUIREMENTS

For precise installation instructions please refer to the units installation manual

ELECTRICAL SUPPLY

2 phase model	
400-415V, 50Hz, (2P+N+E)	
Rated power consumption	5.8 kW
Rated current	20A
20A 5 pin plug	

All Merrychef ovens require installing a type D circuit breaker for all installations.

ELECTRICAL SUPPLY

Microwave	2 kW
Convected heat	2.2 kW
Combination mode	2** + 2.2 kW

**This is approximate microwave power output.

MOFFAT®

Australia
moffat.com.au

New Zealand
moffat.co.nz

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Ph 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Ph 02-8833 4111
nswsales@moffat.com.au

South Australia
Ph 03-9518 3888
vsales@moffat.com.au

Queensland
Ph 07-3630 8600
qldsales@moffat.com.au

Western Australia
Ph 08-9413 2400
wasales@moffat.com.au

New Zealand
Moffat Limited

Christchurch
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Ph +64 9-574 3150
sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.MC.20.09



an Ali Group Company



The Spirit of Excellence